




TOP VIEW

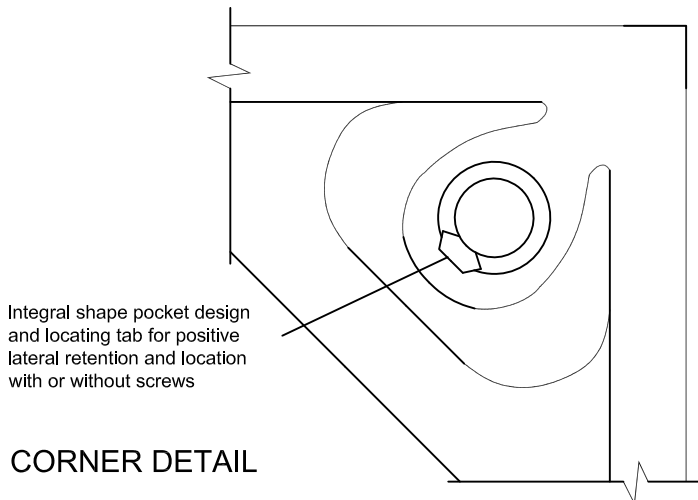

CORNER DETAIL



Bare Panel



Tile w/ Integral Trim

## SPECIFICATIONS

### General information

- Panel weight : 10.25 lbs./ft² bare.
- 1-3/8 inches deep with no covering.
- All steel welded construction filled internally with a cementitious core material.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.
- Non-combustible material.

## UNDERSTRUCTURE OPTIONS

- ☐ 4' Heavy Duty Bolted Stringer w/ fillet welded heads

## COVERING OPTIONS

Tile factory laminated with integral trim edge

- ☐ 1/8" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- ☐ 1/16" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- ☐ 1/8" Conductive HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- ☐ 1/16" Conductive HPL \_\_\_\_\_ (Color) \_\_\_\_\_

For additional laminate options contact Inside Sales

### System Performance Criteria

System performance criteria are the most important to consider because they represent the performance in a typical installation. Panel only criteria such as concentrated load is often used to specify floor systems however, the test is not representative of an actual installation because it is performed with the panel resting on blocks, not actual understructure.

System Performance Criteria (Tested on Actual Understructure)*								
System Type		SYSTEM WEIGHT	STATIC LOADS			ROLLING LOADS		IMPACT LOADS
Panel	Understructure		Design Loads	Safety Factor (min. 2.0)	Uniform Loads	10 Passes	10,000 Passes	
ConCore CC2000-24"	Bolted Stringer	11.5 lbs / ft² 56 kg / m²	2000 lbs 907 kg	Pass	550 lbs / ft² 26.3 kPa	1500 lbs 680 ka	1250 lbs 567 ka	150 lbs 68 kg

\*System load definitions and test procedure descriptions can be found in the Standard Product Tests and Methodology Guide located in the Resources section of Tate's web-site, [www.tateaccessfloors.com](http://www.tateaccessfloors.com).